
SYNTHESIZER SLT II


from concepts to success

- Library synthesis -Automated liquid & solid phase synthesis



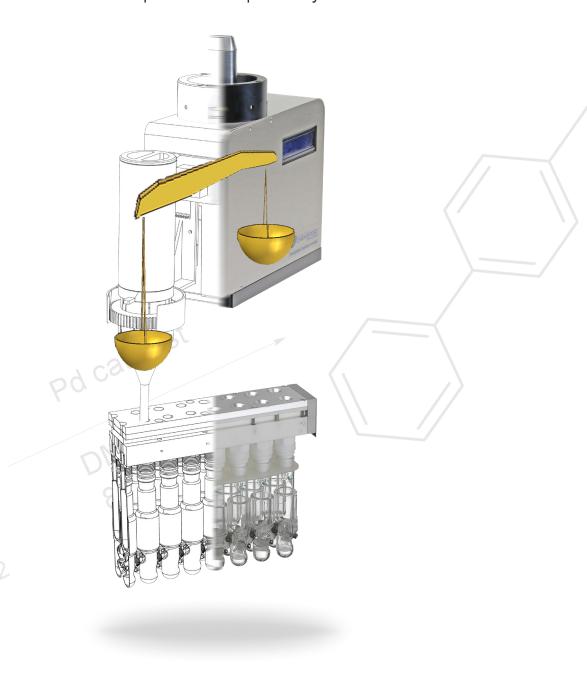

from concepts to success

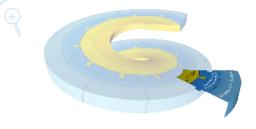



Epoxide solid

(5 times with

Solvent addition

Catalyst Vortex addition agitation

Resin washing

Cleavage (TFA) SPE cartridge DCM)

collection in





SYNTHESIZER SLT II, a modular robotic platform enabling automated synthesis under virtually any conditions


SYNTHESIZER SLT II, is Chemspeed's software-driven robotic platform for challenging parallel synthesis workflows in the Pharmaceutical, Agrochemical, Fine and Specialty Chemicals, Polymer and Catalyst, and other industries.

- SYNTHESIZER SLT // brings paradigm shifting modularity enabling an easy to use workflow task driven software
- Exchangeable robotic tools
- Unrivaled gravimetric dispensing technology directly immersing into the target including an anti-drip system which avoids cross contamination
- Unique reactor block and reactor array technology
- A large choice of hardware and software tools allow fine tuned adaptation to your workflow



Unrivaled gravimetric dispensing technology & exchangeable robotic tools

More than 30 features can be delivered with Chemspeed's unique robotic tool exchange technology, including unrivaled overhead gravimetric dispensing tools. Dispensing solids is as convenient and accurate as dispensing liquids. The product development R&D cycle is accelerated.

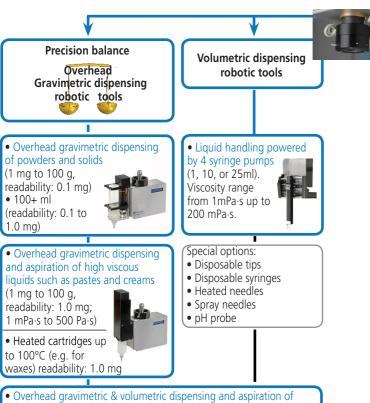

(viscous) liquids with disposable positive displacement

tips (1 mg to 100 g, readability: 1.0 mg; 1 mPa-s

• Including density measurement (aspiration

technology) on the fly, readability: 0.1 mg

Liquid gas dispensing (up to

2.000 g. readability: 0.1 mg)

Action Analytic robotic tools robotic tools High shear homogenization Particle size distribution and dynamic light scattering


(11,000 to 30,000 rpm) Ultrasonic dispersion

Robotic tool exchange interface

- Degassing
- Reflux condenser, Evaporation for 100 ml crimp reactors or blenders
- Filtration
- Injection molding
- Foam formation
- Free film generation • Fiber, textile, hair treatment
- Capping, crimping
 - (N8/ N11/ N20)











pH and temperature

measurement, control and

adjustment, even while in

line powder dispensing

Tri-gloss measurement

• Thickness measurement

Observation of dissolution

Color measurement

Precision tack-cure

Density measurement

Density measurement

(positive displacement)


(aspiration technology) on

the fly, readability: 0.1 mg)

Powered by AutoSuite SYNTHESIZER SLT // user interface

AutoSuite SYNTHESIZER SLT II is an intuitive user interface software which allows easy workflow orientated programming. Many features such as the gravimetric dispensing steps are automatically calibrated, eliminating tedious optimisation steps.

- The AutoTeaching tool allows to dispense solids, liquids, viscous liquids, and waxes without manual optimizing steps, and with high precision, accuracy and speed
- Easy programming: drag-and-drop workflow steps
- Barcode tracking
- Smooth integration into Chemspeed's workflow management software (see reverse)
- AutoSuite Application Programming Interface (API) for 3rd party software and hardware integration (standard integration of Spotfire, JMP, VirtualLab etc. as well as many instruments listed on the reverse page)

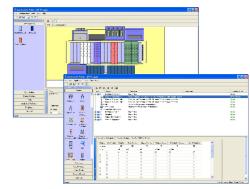



Unique reactor block and reactor array technology for liquid and solid phase

Chemspeed is able to dispense virtually any type of compound into any type of container (vial, microtiter plates, bottles, reactors, formulation vessels etc.)

(Please refer to other Workflow Brochures)

The versatility of Chemspeed's **SYNTHESIZER SLT II** allows full automation of complete workflows including reagent preparation (liquids and solids), multistep synthesis, workup, purification, analysis and product transfer to storage.

Parallel reactor block and reactor array technical specifications:

- Up to 12 synthesis reactor arrays for a maximum of 192 parallel reactors
- Shakable/ heatable/ crimp rack for e.g. disposable reactors
- Reactor volume: from 2 to 100 ml
- Arrays of double-jacketed glass or stainless steel reactors for a broad temperature (-70 to +180°C) and pressure (up to 100 bar) range
- Integrated reflux condensers
- Individually heated reactors (up to 16 different temperatures per block)
- Closure of synthesis reactors by a ceramic or stainless steel valve system (reactor block) allowing operation under high quality vacuum down to 10 mbar (for online evaporation) or inert atmosphere (no need for septa)
- Efficient yet gentle vortex mixing (up to 1,400 rpm), even while accessing the reactor
- Inert atmosphere for sensitive reagents/ inert reaction conditions/ low-temperature chemistry: - Inertization of the synthesis reactors (vacuum/ inert gas cycles)
- Inertization of the entire workstations (self-contained hood)
- Optional pseudomechanical stirring for viscous liquids
- Classical heating and/ or microwave conditions

Disposable synthesis reactors and accessories:

- In solution and/ or on solid phase synthesis
- Crimp reactors for reactor racks (from 2 to 100 ml)
- Reactors for individual heating blocks (from 2 to 100 ml)

Work-up and Analysis:

• Vacuum, filtration, evaporation, liquid/liquid extraction, SPE purification, crystallization, Dean Stark, TLC, interface to analytical devices, etc.



Choice of various reactor sizes: 100 ml, 75 ml, 27 ml, 13 ml, 2 ml




SYNTHESIZER SLT II deck view




Overhead gravimetric dispensing of solids directly into parallel synthesis reactor array

NOW AVAILABLE: Disposable glass reactors



Arrays of double-jackted glass and stainless steel reactors





Accessories

All tools and accessories of Chemspeed 's Swing, Sweigher, Swave, AutoPlant, Formax, Applicator and Investigator are fully compatible with the **SYNTHESIZER SLT II** robotic platform and vice versa (see the high output product development spiral below). Please refer to Chemspeed's other workflow brochures for modularity examples.

- Easy use disposable reactors
- Microwave reactors for batch and continuous microwave-assisted synthesis
- Connection to HPLC (MS), GC (MS) including interfaces
- Large choice of sample, reagent and customized racks
- Additional on-board balance for vial and plate weighing
- Cleaning module
- Tailor-made customer care module



High output product development spiral

Chemspeed's AutoSuite workflow management software integrates with:

1. All of Chemspeed's robotic platforms for


- Sample preparation workflows
- Parallel array synthesis workflows
- Parallel process research workflows
- High output formulation workflows
- High output application workflows
- High output testing workflows

2. Third party instruments

Chemspeed integrates a vast number of 3rd party components (e.g. in robotic tools). Please refer to Chemspeed's Worfklow Portfolio brochure and/ or contact your Chemspeed's representative.

3. Third party software such as

- SpotFire (premium data visualization and selection)
- JMP (design of experiments DoE)
- VirtualLab (lab journal, workflow management, instrument control)
- and many other laboratory software through industry standard languages (SQL, .net, C#, etc)

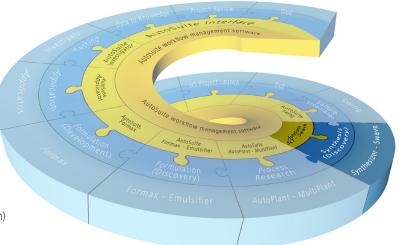

Harware - Software - Logistics Chemspeed Technologies offers all.



